




NEW

Backlight Line Illumination --Briback III (Natural Air Cooling) [IDBC-RE Series]

High luminance diffuse line illumination
Lengths ranging from 100mm to 1,800mm are available as standard products

Natural Air Cooling Compact Design


- Applications**
- Film/FPD-related /Steel/Glass etc.industries
 - ➔ Mark/ Dirt/ Foreign matter inspection etc.
 - Food/ Packaging/ Pharmaceutical etc. industries
 - ➔ Dirt / Bite inspection of wrap etc.

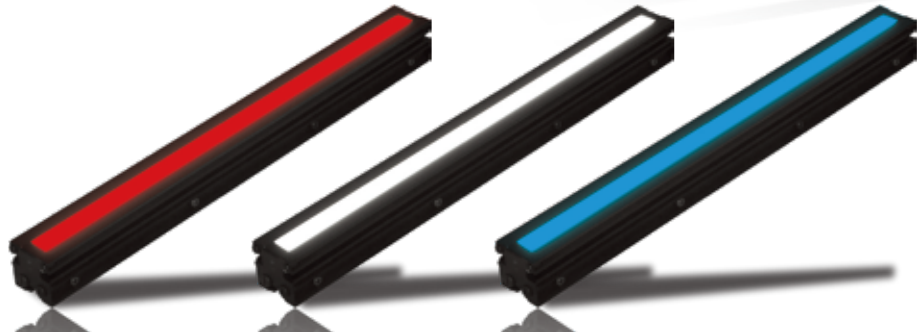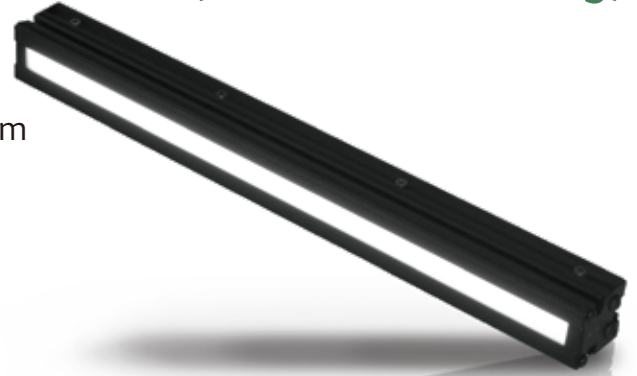

Standard Size Lineup 100 ~ 1,800mm (per.100mm)


Compact Size and Light-Weight Design

Achieved a significant reduction in size, to 30mm x 30mm, by extensively reviewing the optical system and heat dissipation structure.

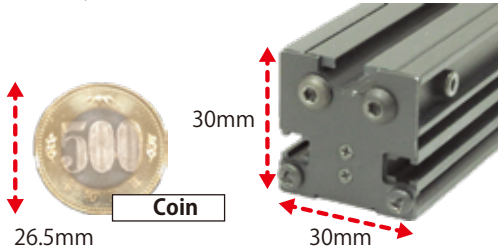


Easy Installation To Fit Clean Room Environments.

Adopted slide nut structure

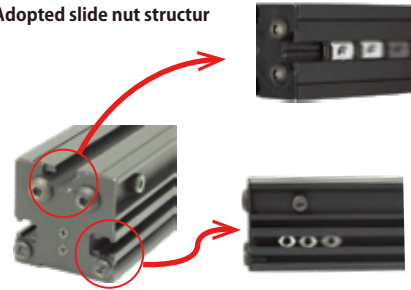

Luminance Distribution Chart(Ref.Value)

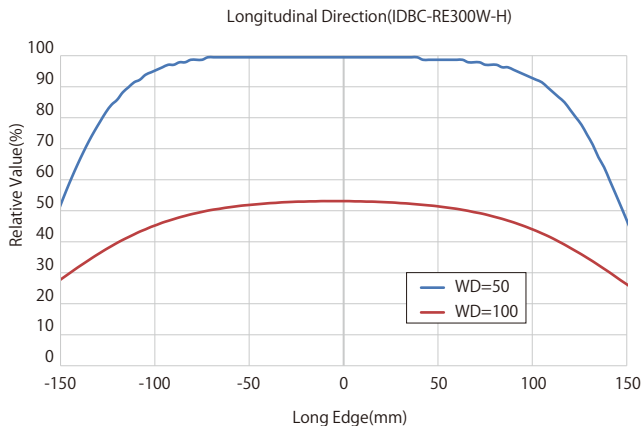

- IDBB-LSRF
- IDBC-LSR
- IDBB-LSRH
- IDBB-LSRA
- IDBB-LSRS
- IDBC-LSRC
- IDBB-LSRC
- IDBC-RE
- IDBB-RE
- IDBA-RK
- IQDH-RE
- IMAR-D_8ch
- IDR-LA-8ch
- IDRA-T-8ch
- IMAR-D
- IMAR-CT D
- IHR-LE
- IHRB · IHRA
- IDR-F
- IDR-F33/16
- IDR
- IDR-LA
- IDRA-T
- IFR · IPR
- IDBA-HM
- IDBA-HMS
- IDBA-HMS-IR
- IDBA-FD
- IDBA-LEH2
- IDBA-LEH
- IDBA-LE
- IDBA-SE
- IDBA-SL
- IDBA
- IDBA-Q
- IFLA · IFLB
- IDHM
- IHMA
- IHMA-V
- IFPA
- IFD-IR
- IHMA-40D
- IFPA-D
- IPOC
- IFHA
- IDDB-KH · IDDA-KH
- IDUB
- IDD
- IDD-CB
- IQD · IQDH
- IQDA-CB
- IFVA · IFVB
- IFVA-ST
- IFV
- IV-14 · IV-30
- IHV-20 · IHVE-21
- IHVA-SP · IHSL-SP
- IBF
- IHV-FX
- RBOX
- IDBB-CH
- IDHRA
- UV-CAN
- Infrared
- Infrared
- IMAR-RGB
- IDDA-KH-RGB
- RGB Full-color
- ISU
- ISS
- Introduction of Customization
- High-speed and high-magnification series kit products
- ISC-24
- Image capture evaluation kit products
- IDMU
- ILP
- ILC
- ILV
- ILS
- IPPA_G · IRPA_G
- IPSA · IPPA
- IDGC
- IDPA
- IDCA
- IMC
- IWDV-24
- IWDV(S)-48
- ISC
- IJS
- IJS-30M2-TP/SS
- ILS-40M2-PI/SS
- SAG
- SLLUB
- LLUB
- IFIC

