

January 2024

Dear Valued Customer

Leimac Ltd.
LED Illumination Group
Sales Department
TEL: +81-77-585-6771
FAX: +81-77-585-6773

Notice of Discontinuation of LED Illumination (IDBB-RE Series)

We hope this message finds you well. We are reaching out to inform you of an important update regarding our product line IDBB-RE series.

After careful consideration, we regret to inform you that we will be discontinuing the production of our current model. We understand the impact this decision may have, and we want to assure you that it was made with careful thought and consideration of the evolving needs of our customers.

However, we are excited to introduce our new generation of products IDBC-RE series that will serve as successors to the current line. These new models embody the latest advancements in technology, design, and functionality.

We are confident that they will not only meet but exceed your expectations.

For detailed information on the new models and their features, please refer to the following. If you have any questions or require further assistance in transitioning to the successor models, our dedicated support team is ready to help.

Regarding the targeted product, we kindly request your order placement by the final deadline. Thank you for your cooperation.

We appreciate your continued partnership and look forward to serving you with our latest and most advanced solutions.

-details-

1. Last order date

May 31, 2024

*If stock runs out before the above date, we will switch at that time.

Thank you for your understanding.

List of discontinued products and their successors

Discontinued Products	specification		successor
IDBB-RE■△	high luminance	→	IDBC-RE■△-H
IDBB-RE■△-S	high uniformity	→	IDBC-RE■△

*■ is the Illumination length (100-1800). The Illumination length is a multiple of 100.

*The △ indicates the light emitting color (R=red, W=white, B=blue).

*Custom products based on the product in question are also eligible.


If you have any questions, please contact our sales representative.

[Dimensions]


The successor model has a metal connector instead of the 900 mm light-emitting surface length, and the housing length is slightly larger than the discontinued model.

There is no difference in housing width and height.

● **Discontinued Products : IDBB-RE series**

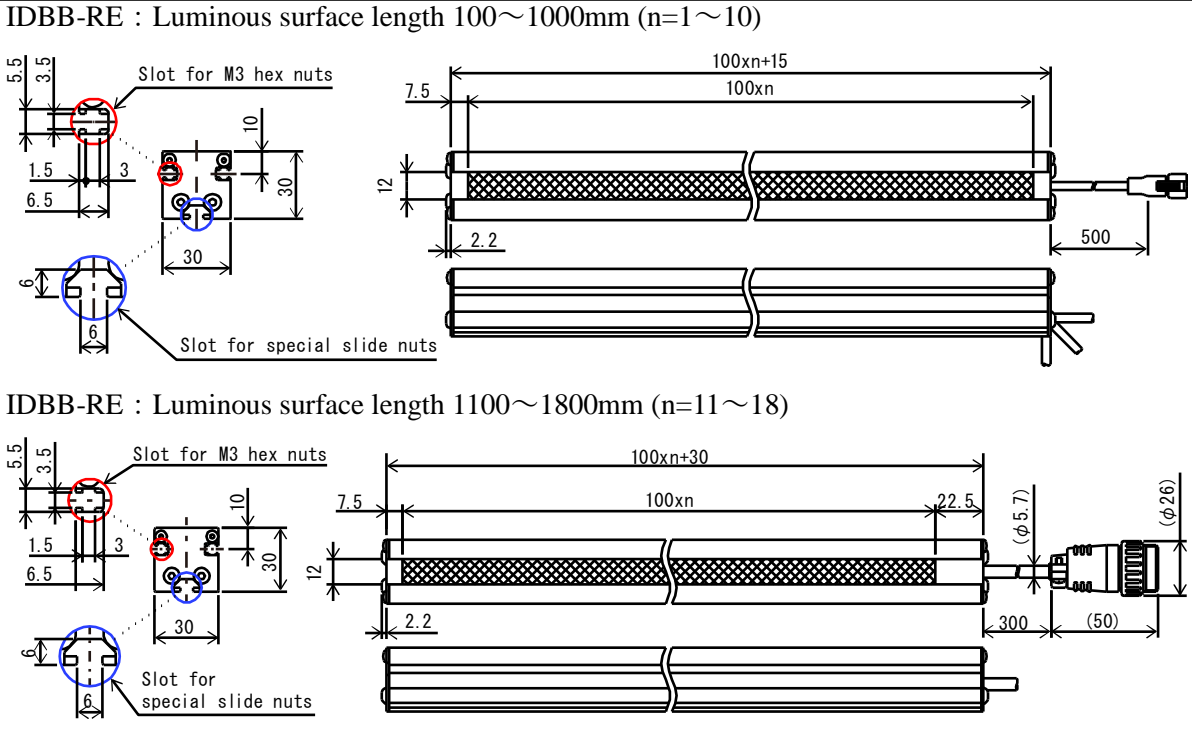

● **successor : IDBC-RE series**


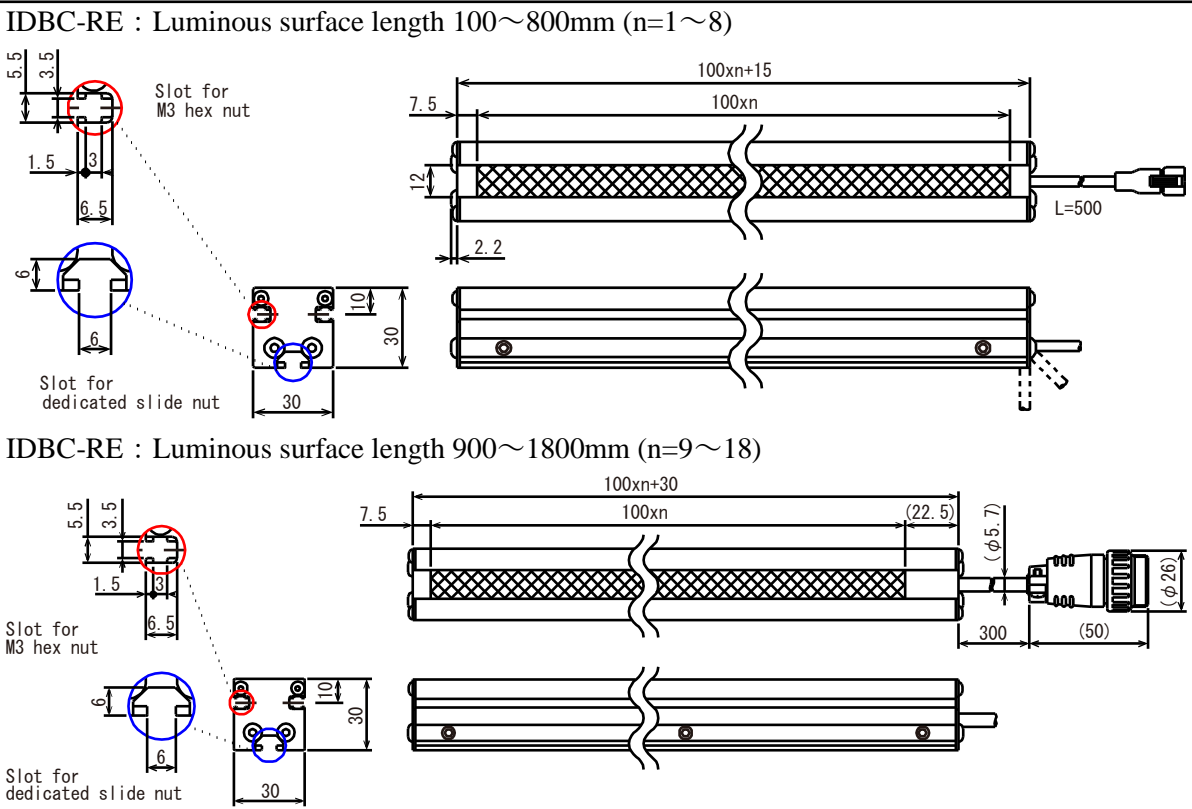


[Wavelength]

	Discontinued Products		successor
high luminance	IDBB-RE series		IDBC-RE-H series
White (color temperature)	5730k (tpy)	→	5500k (tpy)
Red (wavelength)	630nm		647nm
Blue (wavelength)	470nm		468nm
high uniformity	IDBB-RE-S series		IDBC-RE series
White (color temperature)	6020k (tpy)	→	5270k (tpy)
Red (wavelength)	630nm		647nm
Blue (wavelength)	470nm		468nm

[Optical Properties]

Successor models will improve longitudinal luminous surface edge rise

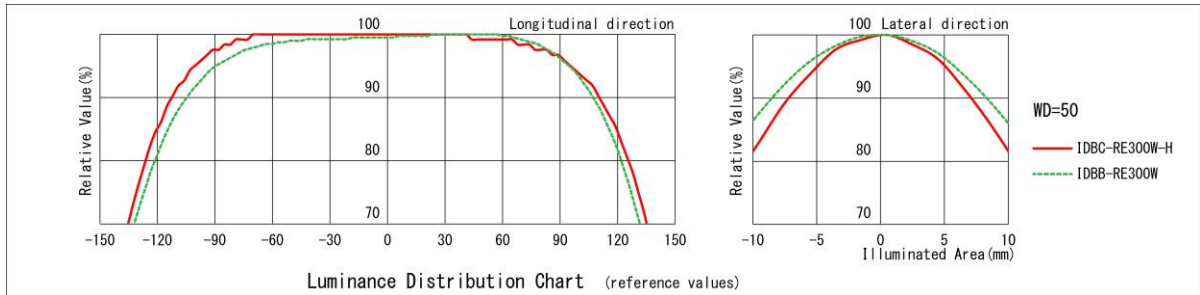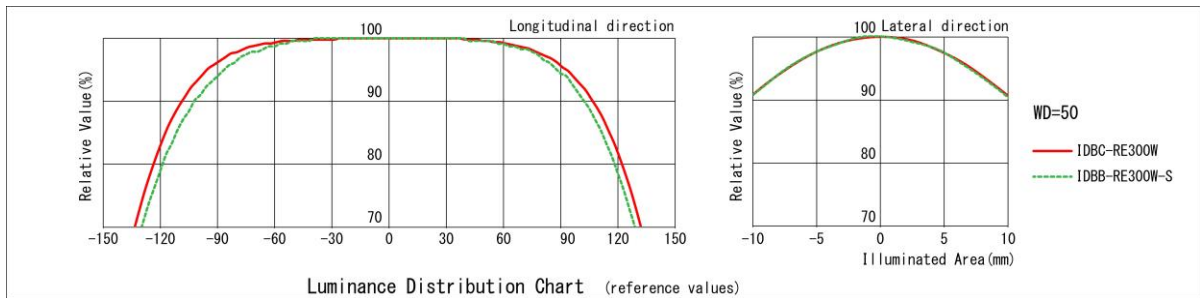

[Power consumption]

	White/Blue	Red
IDBB-RE series IDBB-RE-S series	7W / 100mm	
IDBC-RE series IDBC-RE-H series	8W / 100mm	7.5W / 100mm

[brightness]

